
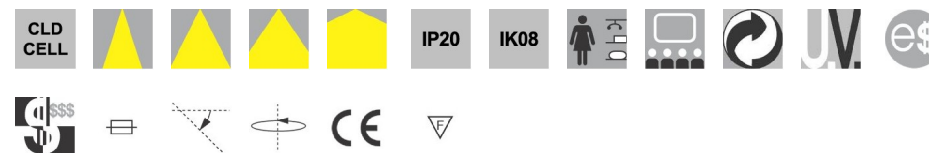


## Compendio ESALED

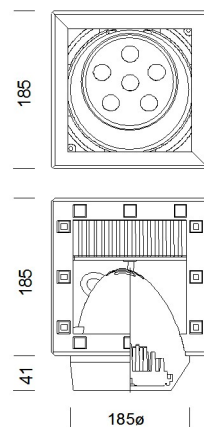

Code	px no. pack.	Gear	Kg	Watt	Colour	Total Installed Power Capacity	Lamps
22281274-00	1	CLD CELL	3.70	ESALED	met. silver	168	3000K - 890lm - 10°
22281271-00	1	CLD CELL	3.70	ESALED	met. silver	168	3000K - 890lm - 25°
22281272-00	1	CLD CELL	3.70	ESALED	met. silver	168	3000K - 890lm - 40°
22281273-00	1	CLD CELL	3.70	ESALED	white	168	3000K - 890lm - 60°

With its extreme versatility, Compendio offers a range of installation options: wall, ceiling, suspension, lamp-stand, single or in multiple sequence. It can also be recessed by using the separate frame.

Housing: Die-cast aluminium, with gear box encased inside the structure.

Coating: Acrylic-resin liquid paint, UV-stabilised after a 6-stage chromate treatment.

Regulations: Manufactured in accordance with standards EN60598 - CEI 34 -21. Degree of protection in accordance with standards EN60529.